


## Nailing and Fastening

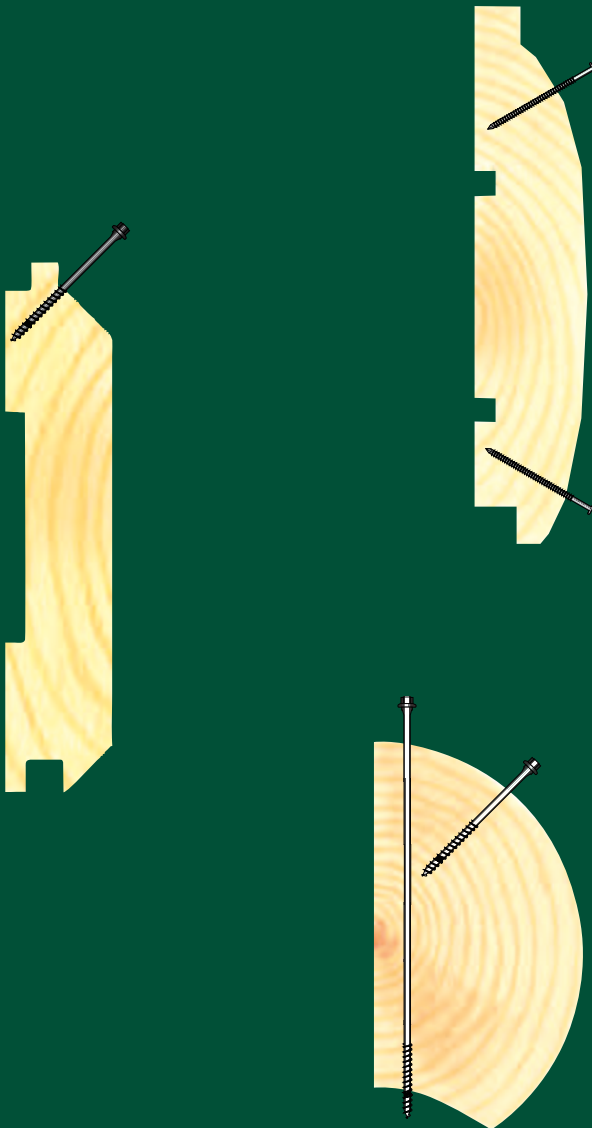

- Splitless siding nails (galvanized) are recommended
- Siding should be fastened every 16" on center
- Fasteners should penetrate a minimum of 1-1/4"
- Always seam on a stud

**5/16" x 6" & 10"  
Log Screws  
recommended for  
this profile**